

## EUROMULTI SIMPLE

Multi-Function Cash Unit With Time Delay Lock



- ✓ Simplified Version Of EuroMulti
- ✓ Ideal For Banks, Post Offices, Gas Stations ...
- ✓ Suitable For Banknotes, Coins, Checks, Cards, Documents ...
- ✓ Button Controlled Operating
- ✓ Time Delay Lock For Each Drawer
- ✓ Tested Construction And Grade "A" Lock
- ✓ Extensible Deposit Panel Available
- ✓ Silent Alarm With Blocking System
- ✓ ISO 9001



**EuroMulti Simple** Security Units are designed to provide an increased cash security during working hours. They provide tested physical and psychological protection. Affordable price enables using them for each cashier. It provides different philosophy of security than expensive and heavy safes.

**EuroMulti Simple** units consist of two main parts – steel box and drawer modules. The front panels of drawers are reinforced with 6 mm thick steel sheets. There are 2 standard models of EuroMulti Simple – 3 drawer versions with fixed or extensible deposit slot.

### What do EuroMulti Simple units offer to you?

- Increasing security for your cashiers and valuables
- The most effective protection during working hours
- The best solutions for open styled bank branches

### EuroMulti Simple units are mainly used for

- Cash deposit/dispense
- Cash exchange

### Features

- Tested construction and grade „A“ lock
- Fixed or extensible deposit slot
- Time delay for each drawer from 0 to 100 min
- Automatic or confirmed opening of all drawers
- Silent alarm activation and blocking system
- Alarm output NO/NC
- ISO 9001 quality management

### Operating

Control of EuroMulti Simple is very easy. At the control panel there are steel buttons that enable opening of the drawers. Each button opens only one drawer. Opening of certain drawer is activated by pressing of relevant button. The unit is activated by grade „A“ lock.


### Opening modes

In standard mode, drawers are opened automatically when time delay elapses. In a special mode security unit beeps when time delay elapsed but drawer remains closed. Drawer will be opened by pressing relevant button again.

### Connection to alarm

Connection can be done by using of NC alarm output at the back side of unit. Alarm is activated by pressing the alarm button which can be externally connected to the unit. All drawers will be blocked after alarm activation. There is a possibility to block all drawers except the first one.



### Drawer combinations

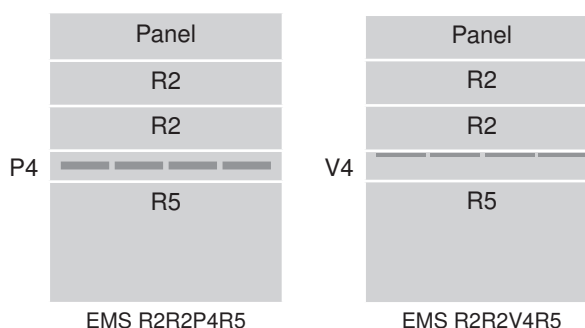

Fixed deposit  
EMS R2R2P4R5



Extensible deposit  
EMS R2R2V4R5

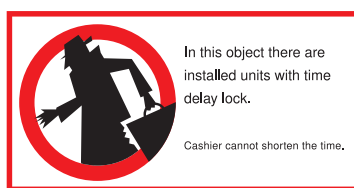

### Technical data

Time delay settings	0-100 min for each drawer
External blocking	10/30 min
Number of drawers	3
Standard color	gray RAL 7035
Power supply	110 - 230/15V, 2A, CE
Dimensions (H x W x D)	690* x 500 x 530 mm, *height adj. + (0 - 30 mm)
Weight	80 kg
Internal volume	96 l