



FM-5540

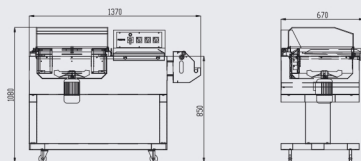


FM-5540A



» Technical Features

- ※ Sealing and shrinking combined and the whole process visible through the transparent hood
- ※ Teflon-coated sealing wire in bakelite slots, making the seams straight, closed and unburnt
- ※ Tailored perforators to fully evacuate the air from the film bags
- ※ FM-5540A is equipped with stainless steel mesh belt with its height adjustable and increases efficiency by feeding out finished products automatically

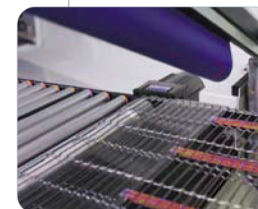

» Scope of application

- ※ Suitable for the outer packing of food, beverage, pharmaceuticals, visual and audio products, hardware, cosmetics, books, toys, plastics and electronics
- ※ An ideal option for shopping malls to pack food, beverage, health care products, printed products, toys for sale one by one or in groups
- ※ Compact footprint in crowded spaces like shopping malls, specialised stores, office buildings and laboratories
- ※ Applicable films: PVC/POF

Model	FM-4030	FM-5540	FM-5540A	FM-8060
Machine Dimensions(mm)	1202×568×1005	1370×670×1080	2022×722.5×1087	1853×1011×1093
Max Packing Size L+H(mm) H<150	≤350	≤450	≤450	≤700
W+H(mm) H<150	≤250	≤330	≤330	≤500
Max Sealing Size(mm)	400×300	500×400	500×400	800×600
Capacity(pcs/h)	500-800	500-800	800-1000	500-800
N.W.(kg)	115	130	140	250
Power(kw)	3.8	4.8	5	6.5
Power Source	1PH 220V 50/60Hz	1PH 220V 50/60Hz	1PH 220V 50/60Hz	1PH 220V 50/60Hz
Applicable Film	POF/PVC	POF/PVC	POF/PVC	POF/PVC